
HADEN











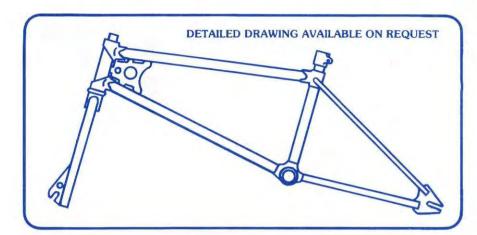



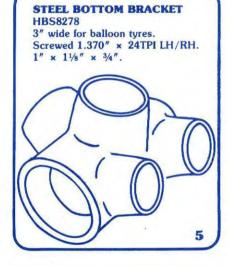

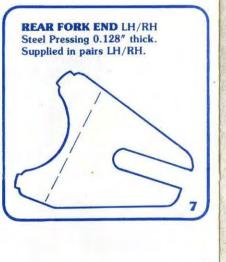

BIXIX Mk 3 Frame and Fork Components


FORK STEERING COLUMN

Ø 1" × 6½" long
Butted Steel Tube.
Screwed 1¼" down
thread 1" × 24 TPI BSC.
Other lengths can be
supplied to customers'
requirements.



BMX FORK CROWN

Whiteheart Malleable Casting. Specially designed with reinforced core. Precision machined. To suit blade types A and B. Registered Design.

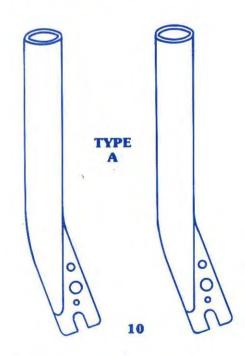

BMX FORK BLADE TYPE A


Supplied in pairs LH/RH. Trapped, pierced, slotted. Ø %" × 16 swg Steel Tube.
Pierced to suit safety tab washer.
To suit cast crown illustrated above.
Registered Design.



FORK STEERING


COLUMN

Ø 1" × 6½" long
Butted Steel Tube.
Screwed 1¼" down
thread 1" × 24 TPI BSC.
Other lengths can be
supplied to customers'
requirements.



BMX FORK CROWN

Whiteheart Malleable Casting. Specially designed with reinforced core. Precision machined. To suit blade types A and B. Registered Design.

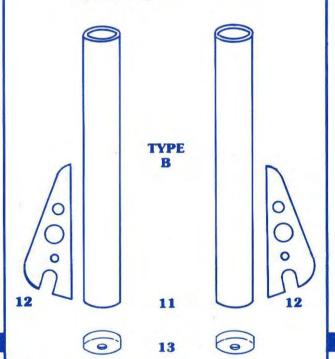

BMX FORK BLADE TYPE B

Plain Tube. Ø 7/8" × 16 swg tube can be supplied from: ERW BS1717 Tube, Reynolds SMS Tube or Reynolds 531 Tube.

BMX FRONT FORK END

Steel Pressing 0.128" thick. Pierced to suit safety tab

BMX FORK BLADE END PLUG

Steel Pressing 0.048" thick. Push fit into end of tube.